

WALL MOUNTED

Sound with Style and Strength


Introducing the new ELAC Muro Pro Outdoor On-Wall Speaker, where modern design meets exceptional versatility. Featuring a clean, sleek profile with no large visible knobs, this speaker seamlessly integrates into any environment, indoors or outdoors. Engineered for durability, it boasts an IP66 rating to withstand the elements, while removable port plugs allow you to transform its design into a ported configuration for enhanced bass performance when weather conditions permit. With its refined aesthetics and innovative functionality, the Muro Outdoor On-Wall Speaker is the perfect blend of style, adaptability, and premium sound quality.

PRODUCT DETAILS




Custom Design

ELAC Muro Pro Outdoor On-Wall Speaker: a sleek, IP66-rated design offering weatherproof durability, adaptable bass performance, and premium sound, perfect for any indoor or outdoor space.



Custom Woofer


Custom polypropylene (PP) woofer, designed for outdoor IP66-rated speakers to deliver powerful, weatherproof performance in any environment.



Custom Tweeter

Enjoy crystal-clear highs with our 1" soft dome tweeter, engineered for outdoor IP66-rated speakers to provide precise, weatherproof audio performance.






FEATURES

Muro Pro Series

Modern Design • Versatility


Watertight Wire Grommet – Features a durable rear

plastic cover that conceals wiring and provides IP66-rated protection, ensuring a clean installation and robust weather resistance.



Flexible Wall/Ceiling Mount

The Muro outdoor speakoffers exceptional versatility and flexibility with its supplied bracket, allowing seamless verti-



cal, horizontal, wall, ceiling, or corner mounting for any installation need.

• Sleek and Unique Design – With no large knobs

and internally mounted brackets, the clean design of this speaker is both stylish and functional. The guided shoulder mount system ensures effortless installation while



maintaining a streamlined, modern look that stands out in any setting.

 Adjustable 70/100 Volt Tap – easily select the desired wattage to optimize power levels for your speaker in distributed audio systems

Removable Port Plugs –


Designed for IP66-rated outdoor use, this speaker features removable port plugs that allow you to switch between a sealed configuration for maximum weather resistance and a ported configuration to enhance bass performance when conditions permit. Transform the design into a ported configuration for enhanced bass

performance when weather conditions permit.


• Adjustable Angles – Shoulder mount has marking in 15 degress increments facilitatng aligment of multiple speakers.

 Rotating Logo – The logo is designed to rotate, allowing seamless mounting

in either vertical or horizontal orientations.










Muro Pro Series

Modern Design • Versatility

	OD-M61	OD-M61T	OD-M81	OD-M81T
SPEAKER TYPE	2-WAY SEALED/PORTED DESIGN			
FREQUENCY RESPONSE -3 dB:	80 то 20Кнz		70 то 20Кнz	
FREQUENCY RESPONSE -6 dB:	65 TO 20KHZ		55 то 20Кнz	
TRANSFORMER TAP		100V 8Ω 30W 15W 7.5W 3.8W (70V)		100V 8Ω * 60W 30 15W 7.5 (70V)
NOMINAL IMPEDANCE	8 Ω		8Ω ±20% @ LOW-Z	
SENSITIVITY @2.83 V/1M	86 dB		87 dB	
CROSSOVER FREQUENCY	2160 Hz			
RECOMMENDED AMPLIIFER POWER	30 - 100 W		30 - 180 W	
NOMINAL/PEAK POWER HANDLING	80/130 W		100/150 W	
TWEETER	25mm Silk Dome Tweeter with 2-layer Copper-Clad Aluminum Voice Coil			
WOOFER (ARAMID-FIBER)	6 ½ " 25MM POLYPROPYLENE CONE, RUBBER SURROUND		8 " 25MM POLYPROPYLENE CONE, RUBBER SURROUND	
CABINET	UV-Resistant Plastic			
CABINET FINISH	Black - White			
Port	Sealed with Option for Ported Design			
SPEAKER CONNECTION	5 - Way Binding Posts		4 Position Euroblock	
WIDTH (IN / MM)	7.87/200		9.84/250	
HEIGHT (IN / MM)	12.2/310		15.35/390	
DEPTH (IN / MM)	9.25/235		11.2/285	
Net Weight (lbs / KG)	7.71/3.5		11.02/5.0	









Muro Pro Series

Modern Design • Versatility

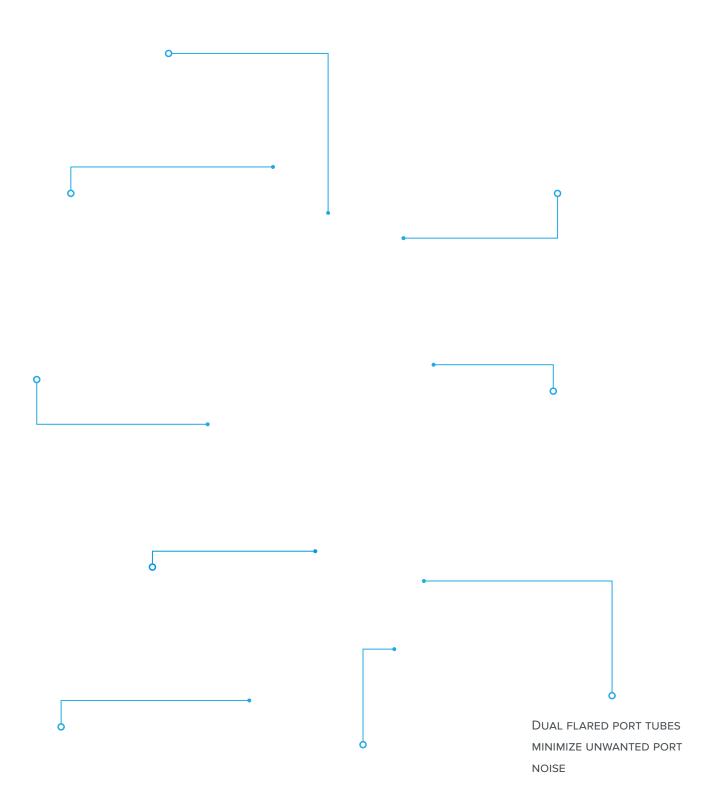







Muro Pro Series

Modern Design • Versatility





