
AS1600

The AS1600 is a professional passive subwoofer with dual 12" drivers in a bass-reflex design. With a rated power of 800 W and a peak power of 1600 W, it ensures maximum performance in low frequencies.
The enclosure is made of robust 15 mm birch plywood with a powder-coated, custom-made and perforated steel grille. Thanks to its size and rubber protection, the AS1600 can be positioned horizontally or vertically. This allows you to integrate it effortlessly into any corner or neatly conceal it in a bar.





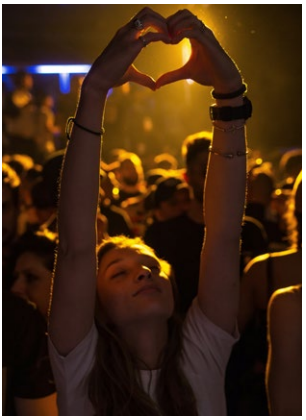

With the AS1600 for the low tones and the UNI75 for the mid and high tones, you have the perfect combo for every situation.

TECHNICAL SPECIFICATIONS

system	passive subwoofer
woofer	2 x 12" EU-transducer
tweeter	-
impedance	4Ω
bass reflex	yes
magnetic shielded	-
amp power	800 / 160 W
sensibility	136dB
frequency range	38Hz - 160Hz
connection	Speakon 2 x NL4 in parallel
dimensions (h x w x d)	340 x 850 x 350mm
weight / piece	38kg
composition	15 mm multiplex box with polyurethane coating
colour	black
accessories	handles, rubber feet
positioning	horizontal / vertical



- Speakon INPUT & LINK THROUGH
- Strong cabinet with polyurethane coating

MADE IN EUROPE